



Safety Guidelines for saw blades





1 Always refer to your power tool owner's manual.



2 Always wear eye and ear protection during operation of power tools.



3 Disconnect the power tool from the power source before changing the saw blade.




4 Never cut stock freehand. Always use the fence or miter gauge to support the workpiece.




5 Keep your hands out of path of the saw blade.



6 Always feed the stock against the direction of the power tool rotation.

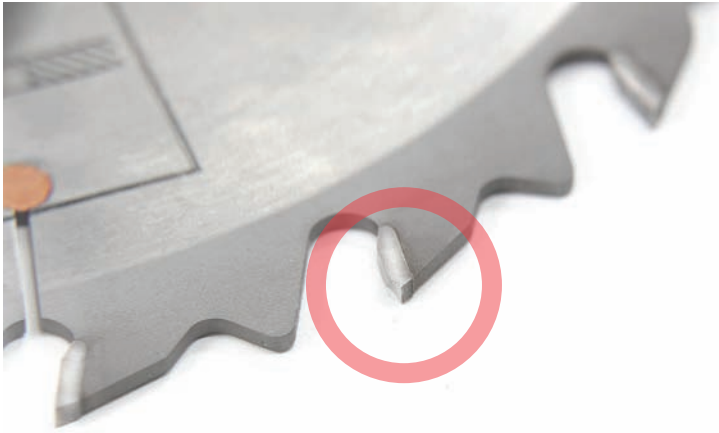

7 Do not use a blade that is cracked or broken, has a chipped or missing tooth, or has been dropped or damaged.

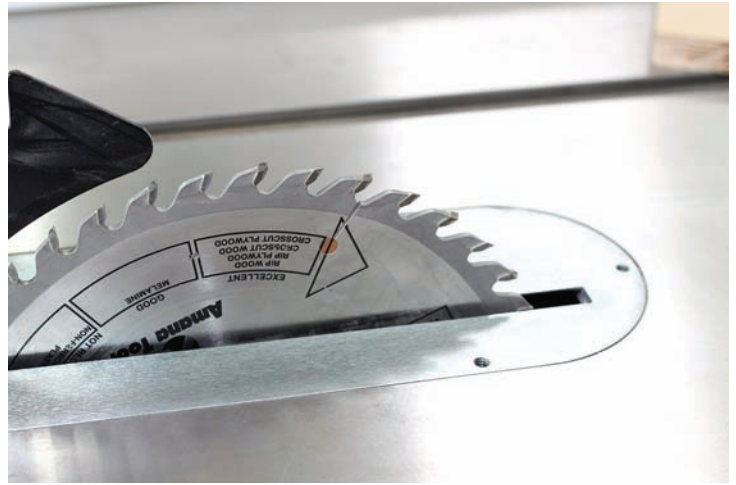

8 When mounting the saw blade, saw teeth must face the direction of power tool rotation.



9 Make certain that the arbor nut is secure before starting the saw.



10 Never exceed maximum RPM of the saw blade. Each blade may differ, please see blade stencil.




11 Do not attempt to cut screws, nails, staples, concrete or other foreign materials. Use saw blade only for which it was intended.



12 Never make adjustments to the saw while the blade is spinning.



13 Use a splitter or riving knife to prevent kickback.

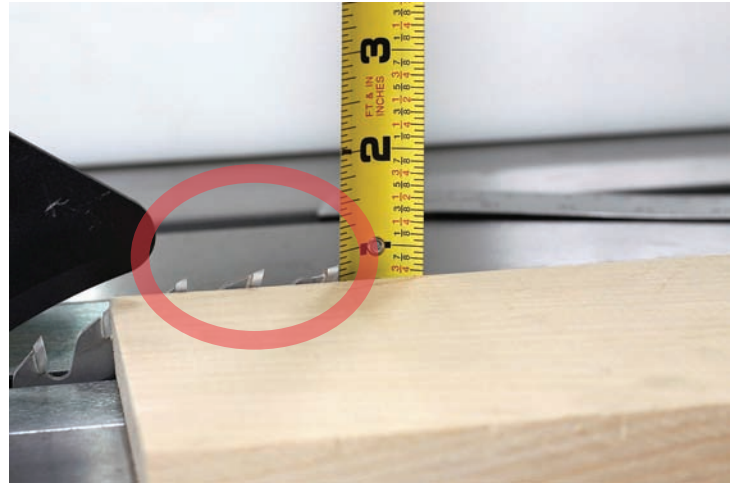

14 Before starting the saw, adjust the saw blade height 1/8" above the workpiece.



15 Always use the guard that came with the saw.



16 Use a push stick to distance your hands from the blade when ripping narrow stock.



17 Allow saw to reach maximum RPM before starting the cut.



18 Make certain the workpiece is supported before starting the saw.



19 Never use fence(A) and the guide(B) at the same time. Do not force the blade into the cut. Use a feed rate that does not bog down the saw.



20 Use roller stands to support the large workpiece.



21 Have your saw blade professionally sharpened and inspected.



22 Keep the saw blade sharp and clean.